




Que-2-TXT™
Questions?
scan to text us fast



LINEAR BATTEN LED LAMP

HIGH OUTPUT LINKABLE



specifications

Consumption	Lumen Output	Efficacy	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
-------------	--------------	----------	------	-----------	-----------	------------------	--------------	------------	-----	-----	------------

15W	1,875	62 LM/W	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	IP40	83	<20%	21.61" x 1.61" x 1.41"
-----	-------	---------	---------------	----------	--------	------------	------	------	----	------	------------------------

select your lamp

Part Number	Color Temp	Voltage
GI-2DT5D-W30-BF	3000K	120 VAC ⚡
GI-2DT5-D30-BC	4000K	100 - 277 V ⚡
GI-2DT5-C30-BC	5000K	100 - 277 V ⚡



Features


- Linkable up to 200W.
- Aluminum housing allows for excellent heat dissipation.
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- Patent Male-female linkable design.
- 3000K option is line voltage dimmable.

add your accessories*


Accessories Part Number	Description
GI-ACC-3PC	3' power cable with plug
GI-ACC-6PC	6' power cable with plug
GI-ACC-15CC	1.5' linking cable
GI-ACC-6CC	6' linking cable
GI-ACC-SUS-DT5	suspension kit
GI-ACC-MC-T8	magnetic clip

*optional

Light Distribution Curve

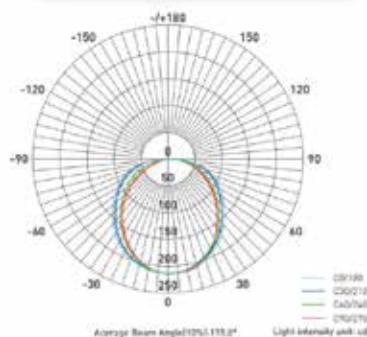

Lux vs Distance

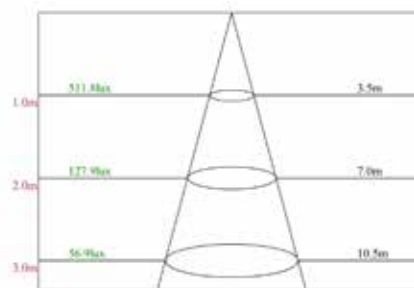

other

Warranty	Weight	Case QTY
6 years	0.66 lbs	20 pcs

Included accessories :

- * screws & clips
- * small connector
- * power cords



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779