



specifications

Consumption	Lumen Output	Efficacy	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
9W	1,170	130 LM/W	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	IP40	83	<20%	23.6" x 1.53" x 1.65"

select your lamp

Part Number	Color Temp	Frosted	DIM	Voltage
GI-2T8D-W20-BF	3000K	<input type="checkbox"/>	<input type="checkbox"/>	120 VAC ⚡
GI-2T8-D20-BF	4000K	<input type="checkbox"/>	<input type="checkbox"/>	100 - 277 V ⚡
GI-2T8-D20-BC	4000K	<input type="checkbox"/>	<input type="checkbox"/>	100 - 277 V ⚡
GI-2T8-C20-BC	5000K	<input type="checkbox"/>	<input type="checkbox"/>	100 - 277 V ⚡

Frosted frosted DIM dimmable (line voltage)



Features


- Linkable up to 200W.
- Aluminum housing allows for excellent heat dissipation.
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- Patent Male-female linkable design.

add your accessories*


Accessories Part Number	Description
GI-ACC-3PC	3' power cable with plug
GI-ACC-6PC	6' power cable with plug
GI-ACC-15CC	1.5' linking cable
GI-ACC-6CC	6' linking cable
GI-ACC-SUS-DT5	suspension kit
GI-ACC-MC-T8	magnetic clip

*optional

Light Distribution Curve



Spectral Distribution

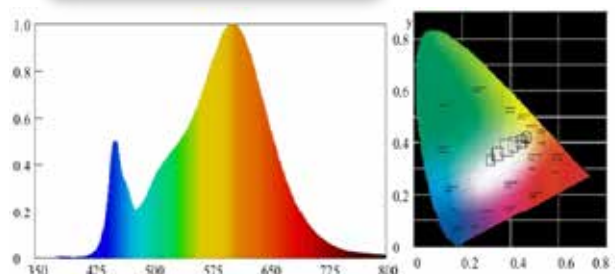

other

Warranty	Weight	Case QTY
6 years	0.77 lbs	20 pcs



Included accessories :

- * screws & clips
- * small connector
- * power cords



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

