



specifications

Consumption	Lumen Output	Efficacy	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
30W	3,750	125 LM/W	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	IP40	83	<20%	44.23" x 1.61" x 1.41"

select your lamp

Part Number	Color Temp	Voltage
GI-4DT5D-W60-BF	3000K frosted cover	120 VAC ⚡
GI-4DT5D-D60-BF	4000K frosted cover	100 - 277 V ⚡
GI-4DT5-D60-BC	4000K clear cover	100 - 277 V ⚡
GI-4DT5-C60-BC	5000K clear cover	100 - 277 V ⚡



Features


- Linkable up to 200W.
- Aluminum housing allows for excellent heat dissipation.
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- Patent Male-female linkable design.
- 3000K option is line voltage dimmable.

add your accessories\*


Accessories Part Number	Description
GI-ACC-3PC	3' power cable with plug
GI-ACC-6PC	6' power cable with plug
GI-ACC-15CC	1.5' linking cable
GI-ACC-6CC	6' linking cable
GI-ACC-SUS-DT5	suspension kit
GI-ACC-MC-T8	magnetic clip

\*optional

Light Distribution Curve



Lux vs Distance

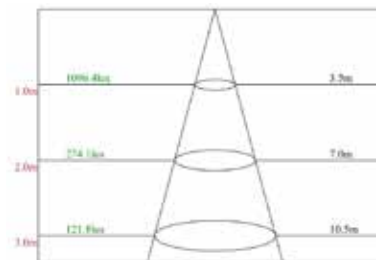

other

Warranty	Weight	Case QTY
6 years	1.32 lbs	20 pcs



- Included accessories :
- \* screws & clips
  - \* small connector
  - \* power cords



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

