



Que-2-TXT™
Questions?
scan to text us fast



LINEAR T5 RETROFIT LED LAMPS



4' fluorescent equal

specifications

Consumption	Lumen Output	Efficacy	Voltage	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THC	Dimensions
24W	3,200	133 lm / w	100-277 V or ballast compatible*	G5	polycarbonate with glass coating	PBT	50,000	-4° - 113°	>0.9	IP40	83	<20%	45.79" x 0.62

select your lamp

Part Number	Color Temp
GI-4T5-WD54GS-ULMF4	3500K
GI-4T5-D54GS-ULMF4	4000K
GI-4T5-C54GS-ULMF4	5000K

other


Warranty	Weight	Case QTY
6 years	0.35 lbs	25 pcs




Features

- 2 in 1 Ballast compatible.
- Shatterproof design.
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- Reduces energy consumption up to 60%

Spectral Distribution

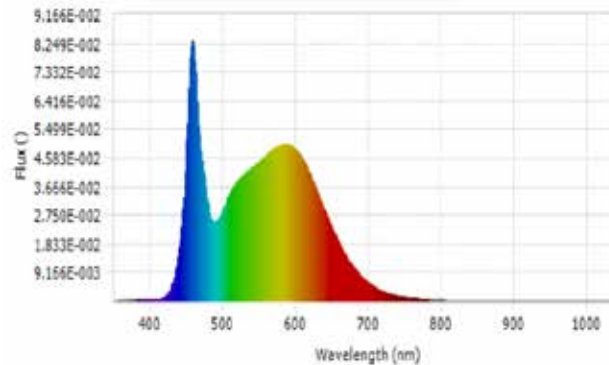

Chromaticity Diagram

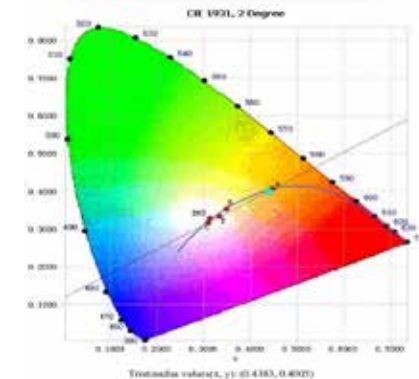

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779