



specifications

Consumption	Lumen Output	Efficacy	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
30W	3,750	125 LM/W	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	wet location IP65	83	<20%	47.24" x 1.69" x 1.45"

select your lamp

Part Number	Color Temp	Voltage
GI-4DT5D-W60P-BFWS	3000K (S)	120 VAC ⚡
GI-4DT5D-W60P-BFWL	3000K (L)	120 VAC ⚡
GI-4DT5D-D60P-BFWS	4000K (S)	100 - 277 V ⚡
GI-4DT5D-D60P-BFWL	4000K (L)	100 - 277 V ⚡
GI-4DT5D-C60P-BFWS	5000K (S)	100 - 277 V ⚡
GI-4DT5D-C60P-BFWL	5000K (L)	100 - 277 V ⚡

(L) linkable (middle piece with cables on both ends)
(S) single side cable (end piece)

Features

- Linkable up to 200W
- 80% energy savings compared to HID technology
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Includes a 30" cable
- 3000K option is line voltage dimmable

add your accessories*

Accessories Part Number	Description
GI-ACC-SUS-DT5	suspension kit (includes cables)
GI-ACC-MC-T8	magnetic clip




*optional


other

Warranty	Weight	Case QTY
6 years	1.10 lbs	20 pcs

Light Distribution Curve

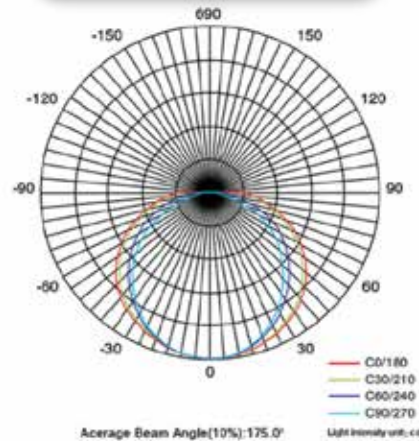

Lux vs Distance

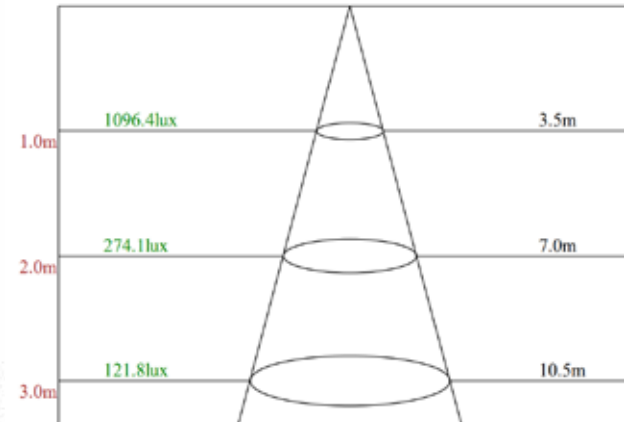

Included accessories:
* screws & clips



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

