



Que-2-TXT™
Questions?
scan to text us fast



4' LINEAR PLASTIC LED TUBE

40W

fluorescent equal

MULTI-FUNCTIONAL

specifications

Consumption	Voltage	CRI	BASE	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Dimensions
18W	100-277 V or ballast compatible*	83	G13	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	damp location fully enclosed fixtures	<20%	320°	47.76" (L) 1.02" (D)

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-4T8-W34P-ULMF4	3000K	2,150	116 lm / w
GI-4T8-WD34P-ULMF4	3500K	2,150	116 lm / w
GI-4T8-D34P-ULMF4	4000K	2,200	125 lm / w
GI-4T8-C34P-ULMF4	5000K	2,200	125 lm / w
GI-4T8-CC34P-ULMF4	6000K	2,200	125 lm / w
GI-4T8-ECC34P-ULMF4	6500K	2,200	125 lm / w

other

Warranty	Weight	Case QTY
6 years	0.44 lbs	25 pcs




Features


- Rated for fully enclosed fixtures
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Double side powered




Isolux Diagram

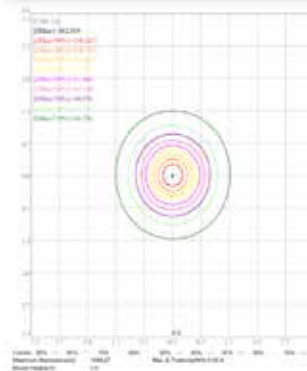


Distance vs Illumination

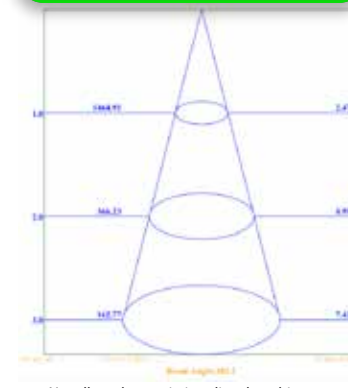

Wiring Diagram



Ballast Compatible

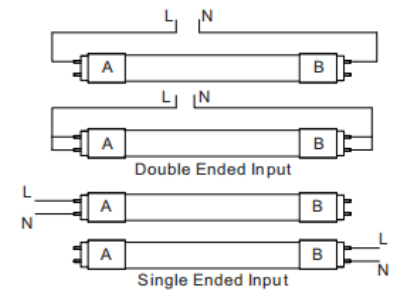

Input voltage: 120-277Vac 50/60Hz

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779