



specifications

Consumption	Lumen Output	Efficacy	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
18W	2,250	125 LM/W	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	IP40	83	<20%	47.24" x 1.53" x 1.65"

select your lamp

Part Number	Color Temp	Voltage
GI-4T8-CCT36-BF	30K, 40K, 50K selectable Frosted	100 - 277 V ⚡
GI-4T8D-W36-BF	3000K Frosted DIM	120 VAC ⚡
GI-4T8D-WD36-BF	3500K Frosted DIM	120 VAC ⚡
GI-4T8-D36-BF	4000K Frosted	100 - 277 V ⚡
GI-4T8-D36-BC	4000K	100 - 277 V ⚡
GI-4T8-C36-BC	5000K	100 - 277 V ⚡

Frosted frosted DIM dimmable (line voltage)



add your accessories*

Accessories Part Number	Description
GI-ACC-3PC	3' power cable with plug
GI-ACC-6PC	6' power cable with plug
GI-ACC-15CC	1.5' linking cable
GI-ACC-6CC	6' linking cable
GI-ACC-SUS-DT5	suspension kit
GI-ACC-MC-T8	magnetic clip

*optional

other

Warranty	Weight	Case QTY
6 years	1.32lbs	20 pcs

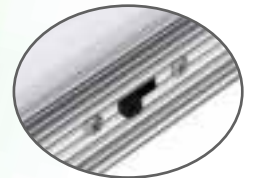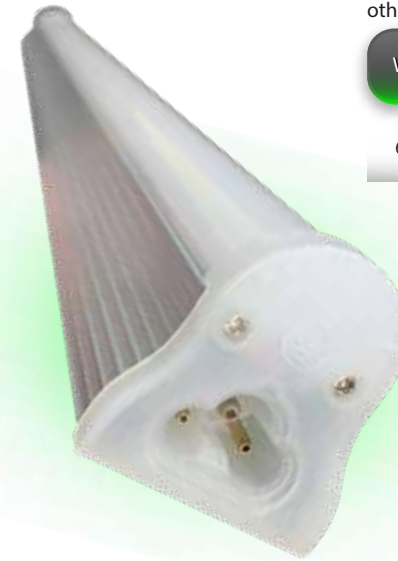


selectable switch


Features

- ▶ Linkable up to 200W
- ▶ Aluminum housing allows for excellent heat dissipation.
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- ▶ Patent Male-female linkable design.

Light Distribution Curve



Chromaticity Diagram

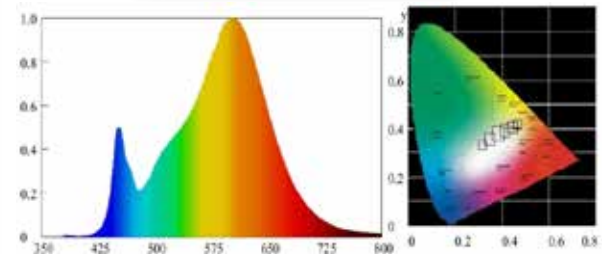

Included accessories :

- * screws & clips
- * small connector
- * power cords



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

