



Que-2-TXT™
Questions?
scan to text us fast



VAPOR PROOF LED FIXTURE

120W



4 FT

fluorescent equal

specifications

Lens	CRI	Finish	Consumption	Lumen Output	Efficacy	Material	L70 hours	SP	Ambient Temp (F)	Power Factor	UL listing	THD
polycarbonate	>70	white	60 W	7,800	130 LM / W	fiberglass reinforced polyester	50,000	10 KV optional	-22° - 104°	> 0.9	wet location	< 0.2

Part Number	Color Temp	Voltage
GI-4VTF-CCT120T3-UL4	3500K 4000K 5000K selectable	120 - 277 V

select your accessories*



Part Number	Description
GI-ACC-VT4OCC	occupancy sensor
GI-ACC-EB	emergency battery back up


other

Warranty	Dimensions	Case QTY
6 years	47-2/8" (L) 4-7/8" (W) 33-5/8" (H)	1 pc



optional*

Power Distribution & Chromaticity Diagram

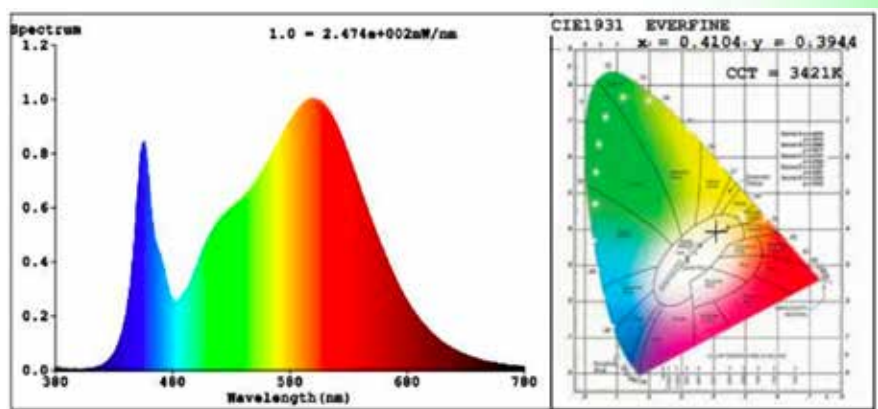

- ### Features
- Durable, UV resistant, polycarbonate lens
 - 6 Year warranty
 - Fully protected against water and other corrosive contaminants
 - 0-10V Dimmable



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite

www.greenignite.com

info@greenignite.com

1-877-560-3779