



specifications

Lens	CRI	Finish	Consumption	Lumen Output	Efficacy	Material	L70 hours	SP	Ambient Temp (F)	Power Factor	UL listing	THD
polycarbonate	>70	white	100 W	12,500	125 LM / W	fiberglass reinforced polyester	50,000	10 KV optional	-22° - 104°	> 0.9	wet location	< 0.2

Part Number	Color Temp	Voltage
GI-8VTF-CCT200T3-UL4	<span style="border: 1px solid black; border-radius: 50%; padding: 2px;">3500K</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px; margin-left: 5px;">4000K</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px; margin-left: 5px;">5000K</span> selectable	120 - 277 V


select your accessories\*

Part Number	Description
GI-ACC-VT4OCC	occupancy sensor
GI-ACC-EB	emergency battery back up



other

Warranty	Dimensions	Case QTY
6 years	94-4/8" (L) 4-7/8" (W) 4" (H)	1 pc


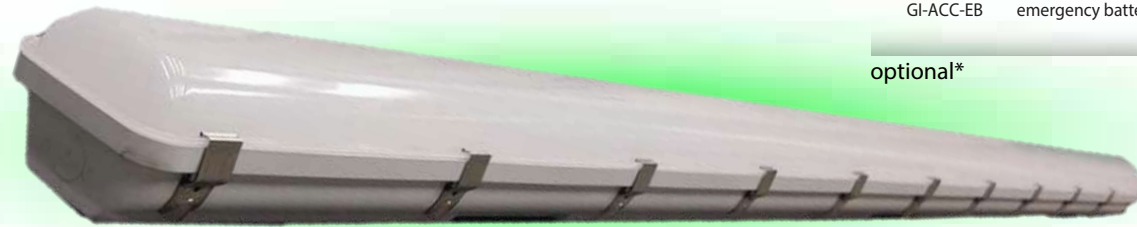


optional\*

Power Distribution & Chromaticity Diagram

**Features**

- Durable, UV resistant, polycarbonate lens
- 6 Year warranty
- Fully protected against water and other corrosive contaminants
- 0-10V Dimmable

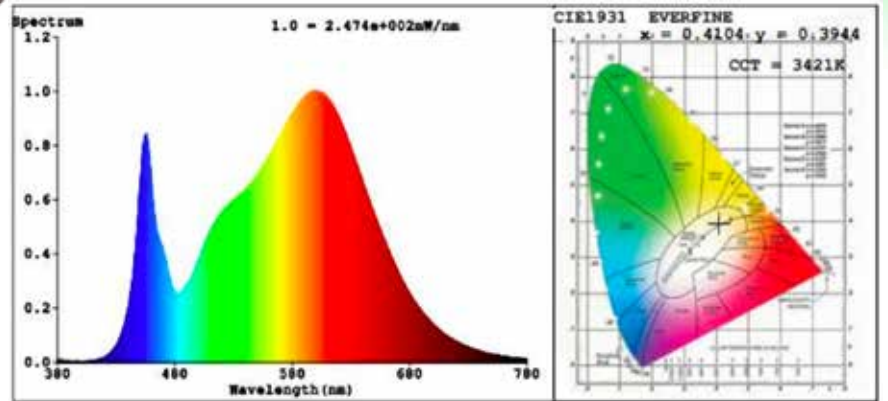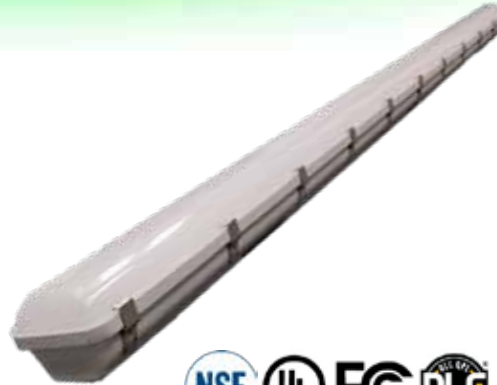

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

