



Que-2-TXT™  
Questions?  
scan to text us fast



# WALL PACK LED FIXTURE ADJUSTABLE FULL CUT OFF



## specifications

Consumption	CRI	Lens	Material	Lumen Output	L70 hours	SP	Ambient Temp (F)	Power Factor	UL listing	THD	Efficacy	Dimensions
40W	>70	polycarbonate	die-cast aluminum	5,200	50,000	10 KV optional	-40° - 131°	> 0.9	wet location IP 65	<20%	130 LM / W	7.290" x 9.128" x 4.197"

## select your lamp

Part Number	Color Temp	Finish	Voltage
GI-AFC-C175-UL4	5000K	bronze coat	100 - 277 V ⚡

## select your accessory\*


Part Number	Description
GI-ACC-BPC	button photocell

## other

Warranty	Weight	Case QTY
6 years	3.968 lbs	1 pc




## \*optional

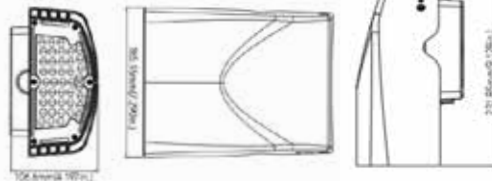


## Features

- Durable, die-cast aluminum housing with excellent heat dissipation.
- Housing is completely sealed against moisture and environmental contaminants.
- Provides a low-profile architectural style with the power of bright, energy efficient LEDs
- LED head is adjustable 90°


## Vertical Isolux Plot

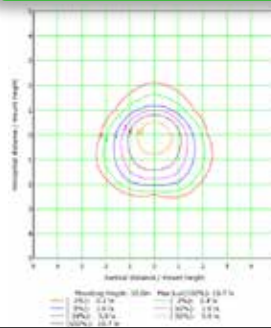

## Luminous Intensity Distribution

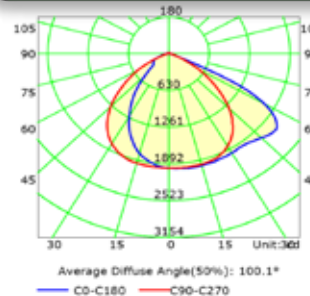

## Distance vs Illumination

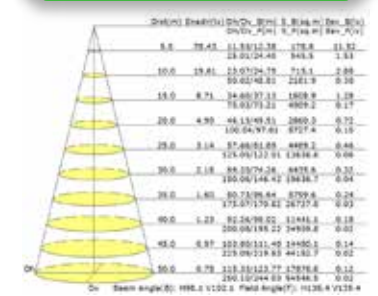

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.



/greenignite  
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779