




Que-2-TXT™
Questions?
scan to text us fast



WALL PACK LED FIXTURE ADJUSTABLE FULL CUT OFF



specifications

Consumption	CRI	Lens	Material	Lumen Output	L70 hours	SP	Ambient Temp (F)	Power Factor	UL listing	THD	Efficacy	Dimensions
80W	>70	polycarbonate	die-cast aluminum	10,500	50,000	10 KV optional	-40° - 131°	> 0.9	wet location IP 66	<20%	131.3 LM / W	10.061" x 11.024" x 5.091"

select your lamp

Part Number	Color Temp	Finish	Voltage
GI-AFC-C400-UL4	5000K	bronze coat	100 - 277 V ⚡

select your accessory*


Part Number	Description
GI-ACC-BPC	button photocell

other

Warranty	Weight	Case QTY
6 years	7.804 lbs	1 pc




*optional

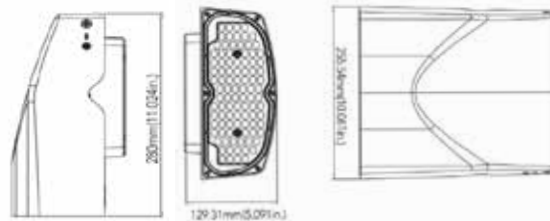


Features

- Durable, die-cast aluminum housing with excellent heat dissipation.
- Housing is completely sealed against moisture and environmental contaminants.
- Provides a low-profile architectural style with the power of bright, energy efficient LEDs
- LED head is adjustable 90°


Vertical Isolux Plot

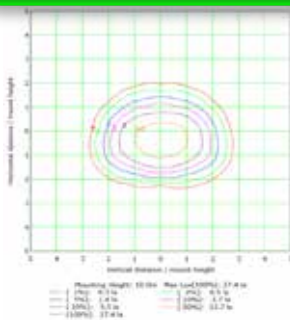

Luminous Intensity Distribution

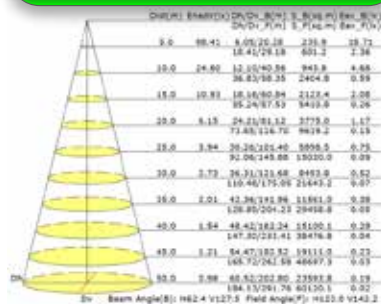

Distance vs Illumination

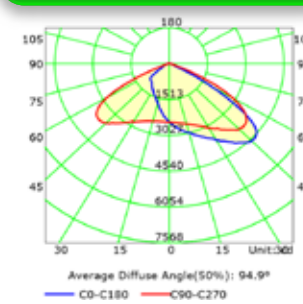

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779