




Que-2-TXT™
Questions?
scan to text us fast



CANOPY UFO LED FIXTURE

SURFACE MOUNT



specifications

Finish	CRI	Lens	Material	Lumen Output	L70 hours	Efficacy	Ambient Temp (F)	SP	Power Factor	UL listing	THD	Dimensions
white coat	>70	polycarbonate	die-cast aluminum	5,000	50,000	111.11 LM / W	-40° - 131°	10 KV optional	> 0.9	wet location IP 65	<20%	12" x 3.32"

select your lamp

Part Number	Color Temp	Consumption	Voltage
GI-CPM-C175-UL3	5000K	45W	100 - 277 V ⚡

add your accessories*


Part Number	Description
GI-ACC-OCC	occupancy sensor
GI-ACC-UFOB	emergency back up kit

other

Weight	Warranty	Case QTY
5.4 lbs	6 years	1 pc



*optional




Features


- Increase energy savings with bi-level Motion sensor.
- Housing is completely sealed against moisture and environmental contaminants.
- Polycarbonate optical lens with UV stabilizers.
- 0 - 10V dimmable



Vertical Isolux Plot

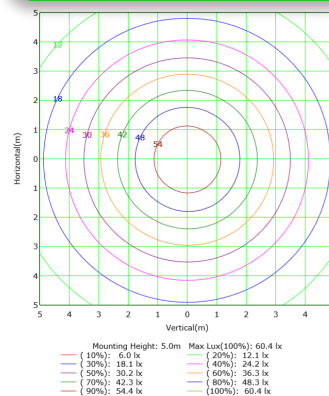

Luminous Intensity Distribution

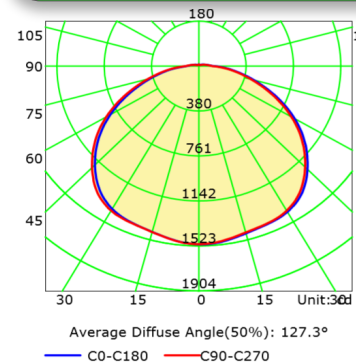

Distance vs Illumination

Dist(m)	Enadir(lx)	Dhv/Dv	B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1510.58	4.02/4.06	13.2	163.54	
2.0	377.64	8.04/8.12	52.7	40.89	
3.0	167.84	12.05/12.18	118.6	18.17	
5.0	60.42	20.09/20.29	329.3	6.54	
6.0	41.96	24.11/24.35	474.2	4.54	
7.0	30.83	28.12/28.41	645.4	3.34	
8.0	23.60	32.14/32.47	843.0	2.56	
9.0	18.65	36.16/36.53	1067.0	2.02	
10.0	15.11	40.18/40.59	1317.2	1.64	

Dhv Beam Angle(B): H127.1 V127.5 Field Angle(F): H175.0 V175.2

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779