

Specifications

CRI	Voltage	Ambient Temp (F)	Housing	Lens	Hardware	IP Rating	Efficacy	Warranty	Case Quantity
80	AC 100-277 V DC 12-48 V	-40° - 149°	A360 die-cast aluminum	tempered glass	stainless steel	IP66	90 LM/W	6 years for fixture	1 pcs

select your fixture

Part Number	Shape	Color Temp	Consumption	Lumen Output	Dimensions	Exit Sign	Spotlight
GI-EPES-C50S-C1D1	square	5000K	10W	900	12" x 6.7" x 11"	not included	included
GI-EPER-C50S-C1D1	round	5000K	10W	900	21.5" x 16.9" x 6.2"	not included	included
GI-EPER-C50ES-C1D1	round	5000K	10W	900	21.5" x 25.8" x 6.2"	included	included
GI-EPER-C50E-C1D1	round	5000K	10W	900	21.5" x 21.2" x 6.2"	included	not included



GI-EPES-C50S-C1D1

Classifications

Class I, Division 1, Groups C, D  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1, Groups E, F, G  
Class II, Division 2, Groups F, G  
Class III

UL 844 Hazardous Locations  
UL 924 Emergency Lighting  
UL 1598A Marine Outside Type




UL 1598 Wet Locations  
UL 8750 LED Safety  
ETL, NEMA 4X

Other Rating  
IP66, IK10

Features

- Rated for high temperatures, humidity, dust and vapor locations
- Spotlight can be adjusted horizontally or vertically
- Built-in battery backup with 3-hour emergency operation
- 0-10V Dimmable
- Includes 3/4" NPT or M25 conduit hubs
- 10kVA Surge protection

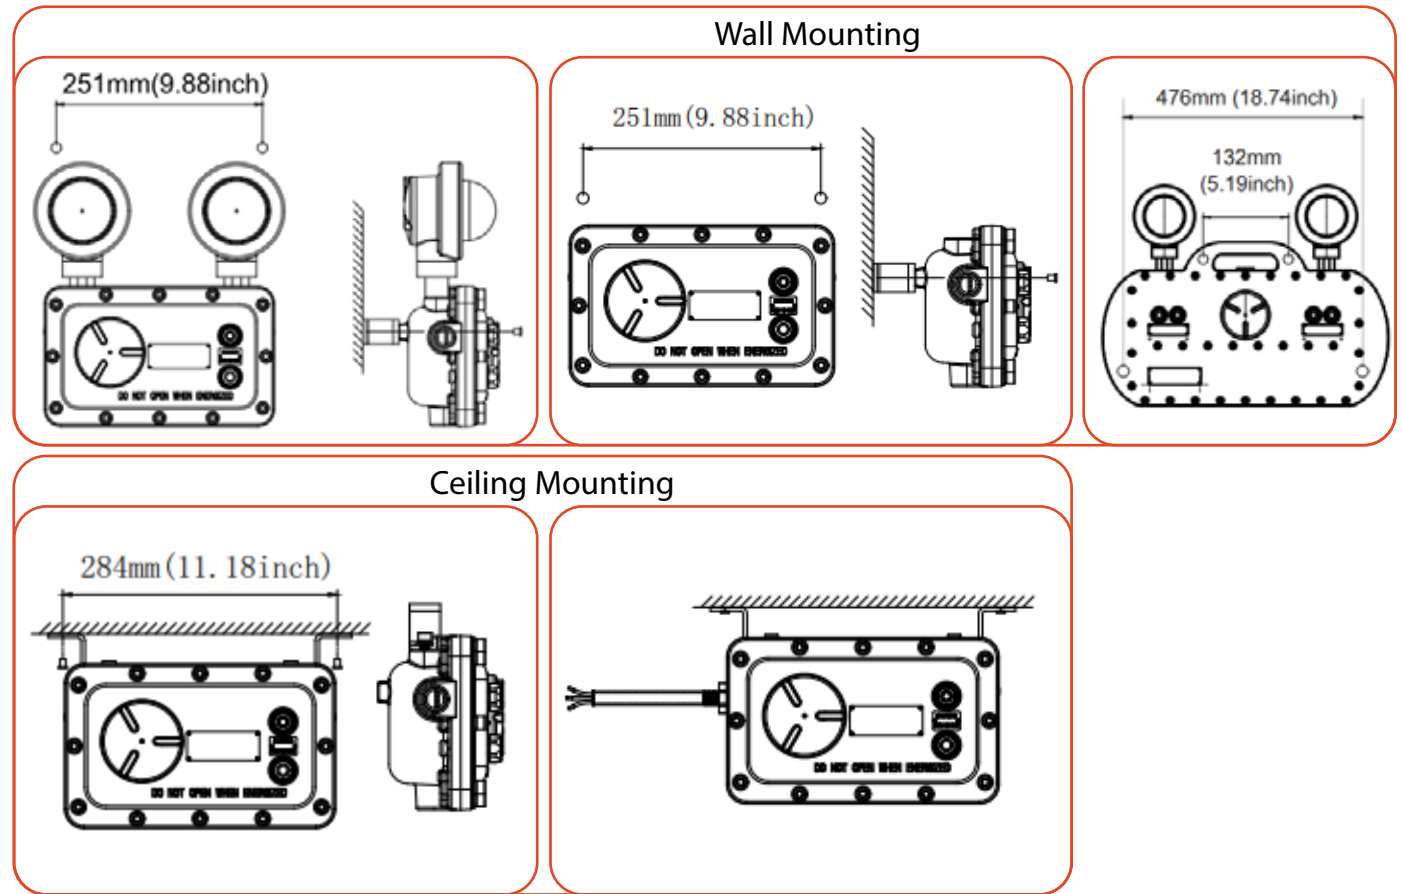

GI-EPER-C50E-C1D1



GI-EPER-C50ES-C1D1



GI-EPER-C50S-C1D1

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

