



specifications

Consumption	Efficacy	Lens	CRI	Finish	Material	L70 hours	EPA	Ambient Temp (F)	Power Factor	UL listing	THD	Distribution	Dimensions
150W / 120W / 90W / 60W selectable	131 LM / W	Polycarbonate	>70	Bronze	Die-cast aluminum	50,000	10 KV optional	-40° - 104°	> 0.9	wet location IP 66	<20%	IESNA type III	19.4" x 13" x 7"

select your lamp

Part Number	Color Temp	Voltage	Lumen Output
GI-FLF-CCT400PS-UL5	30K 40K 50K selectable	100 - 277 V ⚡	150W - 21,500 LM 120W - 17,500 LM 90W - 13,500 LM 60W - 9,500 LM
GI-FLF-CCT400PS-480UL5	30K 40K 50K selectable	347 - 480 V ⚡⚡	150W - 21,500 LM 120W - 17,500 LM 90W - 13,500 LM 60W - 9,500 LM

add your accessories\*

Accessories Part Number	Description
GI-ACC-RPC	receptical for photocell
GI-ACC-LV-TLPC ⚡ GI-ACC-HV-TLPC ⚡⚡	twist lock photocell
GI-ACC-EGS	external glare shield
GI-ACC-EGFV	external glare full visor

\*optional

select your mount\*

Mount Part Number	Description
GI-ACC-ALAM	arm
GI-ACC-ALSF	slip fitter
GI-ACC-ALWM	wall
GI-ACC-YMB	yoke
GI-ACC-ALAM2	adjustable arm

other

Warranty	Case QTY
6 years	1 pc



Wall Mount



Yoke Mount



Arm Mount




Slipfitter Mount



Adjustable Arm Mount

Type 3 lens Distribution

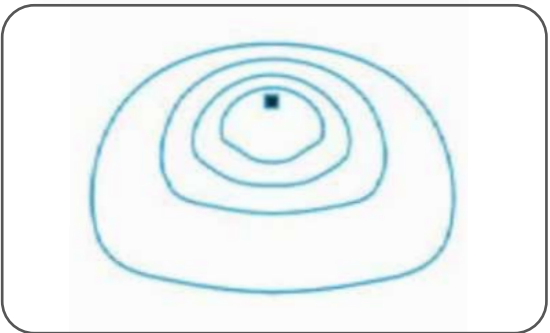

- Features
- Durable, die-cast aluminum housing with heat dissipating fins.
  - 0-10V Dimmable.
  - Housing is completely sealed against moisture and environmental contaminants.
  - Low profile, compact design minimizes wind load requirements.
  - Suitable for mounting heights ranging from 26' - 50'



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

