



Que-2-TXT™
Questions?
scan to text us fast



DOCK LIGHT LED FIXTURE 2 MOUNTING OPTIONS



specifications

Consumption	Lumen Output	Efficacy	Material	Finish	Ambient Temp (F)	L70 hours	SP	CRI	PF	THD	IP Rating	Number of Drivers
30W	3,300	110 lm /W	rugged die-cast aluminum body, stainless steel cage	yellow powder-coat	-31°-131°	50,000	10 KV optional	> 80	> 0.9	< 20%	65 wet location	1

Part Number	Color Temp	Voltage	Net Weight
GI-LDL-D300-G4	4000K	120 - 277 V	3.4 lbs




Choose your mount**

Part Number	Description
GI-ACC-DLAS	single arm
GI-ACC-DLAD	double arm

**optional

other specifications


Dimensions	Warranty	Case QTY
4.23" x 5.51"	6 years	4 pcs

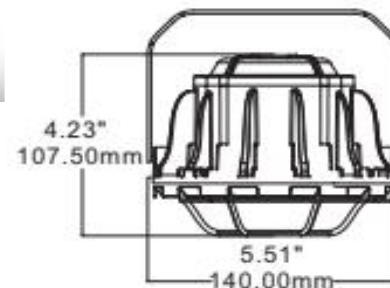


Features

- Designed with an adjustable lamp angle.
- Electrical outlet embedded in the arm for direct plug in connection.
- Compact design utilizes aluminum housing, which dissipates heat for maximum lifespan.
- Frosted polycarbonate cover combats glare, and makes for more uniform lighting.
- Built-in on-off switch for convenience.


Vertical Isolux Plot

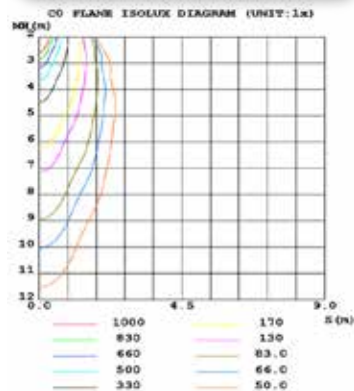

Distance vs Illumination

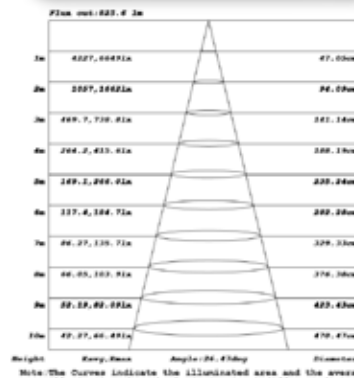

Luminous Intensity Diagram

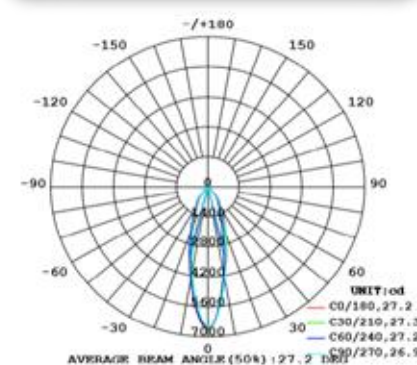

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779