

specifications

Consumption	Lumen Output	Efficacy	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Dimensions
6W	720	120 lm / w	100-277 V ⚡	80	2GX7	polycarbonate	aluminum	50,000	-4°- 104°	>0.95	damp location IP64	<20%	360°	3.94" x 1.18" x 1.06"

*approved electronic ballasts

select your lamp

Part Number	Color Temp
GI-PL2-180W13-2GX7	3000K
GI-PL2-180WD13-2GX7	3500K
GI-PL2-180D13-2GX7	4000K

other


Warranty	Weight	Case QTY
6 years	0.06 lbs	100 pcs




Features

- Mimics traditional fluorescent lamp in light output and shape for seamless retrofit.
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations

(1) If magnetic ballast

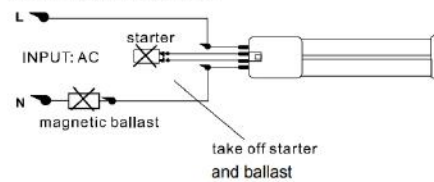

(2) If electronic ballast, without starter

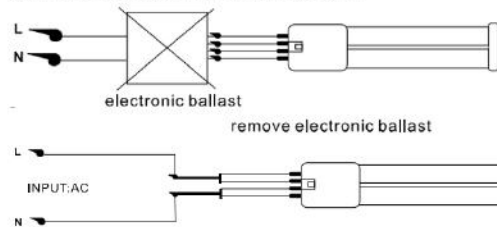

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

