



fluorescent equal

GX23 | COLOR TEMP SELECTABLE

specifications

Consumption	Voltage	CRI	Base	Lens	Dimmable	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Enclosed Fixture Rated
6W	120-277 V	83	GX23	polycarbonate frosted	no	30,000	-22°- 95°	>0.9	IP20	<20%	120°	yes


select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-PLO2-3CCT13-GX23	27K 30K 35K SELECTABLE	650	108 lm / w


other

Dimensions	Warranty
1.48" x 0.83" x 7.09"	6 years

Dimensional Diagram

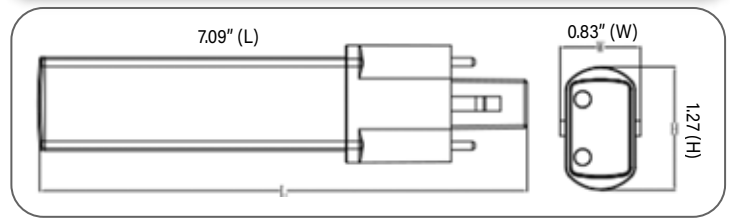

Wiring Diagram

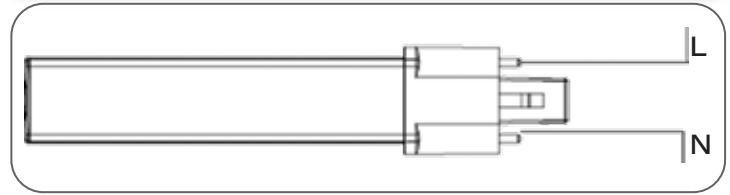

Features

- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Color temperature selectable from 2700K, 3000K and 3500K



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

