

specifications

Consumption	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Enclosed Fixture Rated
6W	100-277 V	80	GX24	polycarbonate frosted	aluminum	50,000	-4° - 104°	>0.95	damp location IP64	<20%	360°	yes

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-PLO2-W13-GX24	3000K	720	120 lm / w
GI-PLO2-WD13-GX24	3500K	720	120 lm / w
GI-PLO2-D13-GX24	4000K	720	120 lm / w

other


Dimensions	Warranty	Gross Weight	Case QTY
1.57" (D) x 4.92 (L)	6 years	0.26 lbs	100 pcs




Features

- ▶ Compatible with GX24, G24Q and G24 bases
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof


Distance vs Illumination

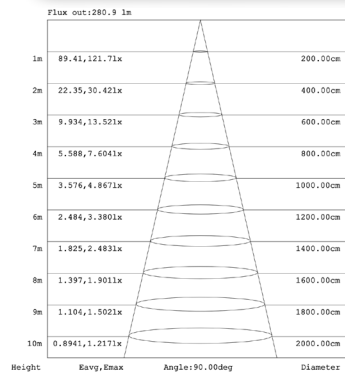

Luminous Intensity Distribution

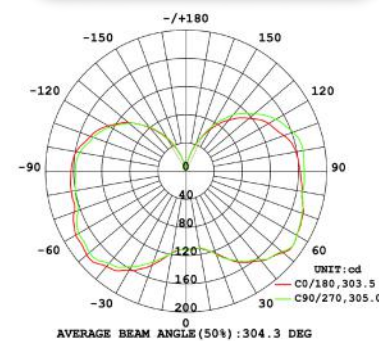

Wiring Diagram



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

