

specifications

CRI	Consumption	Lumen Output	Efficacy	Material	L70 hours	Surge Protection	Beam Angle	Ambient Temp (F)	Power Factor	UL listing	THD	Distribution	Dimensions
72	350W / 280W / 210W / 140W selectable	350W - 60,000 LM 280W - 49,000 LM 210W - 38,000 LM 140W - 26,000 LM	350W - 171 LM/W 280W - 175 LM/W 210W - 181 LM/W 140W - 186 LM/W	die-cast aluminum housing	50,000	10 KV optional	120°	-40° - 149°	> 0.9	wet location IP 65	<20%	IESNA type III	24.25" (D) x 8.724" (H)

select your lamp

Part Number	Color Temp	Voltage
GI-SHBUM-C1500-PSUL5	5000K	100 - 277V ⚡
GI-SHBUM-D1500-PSUL5	4000K	100 - 277V ⚡
GI-SHBUM-C1500-480PSUL5	5000K	347 - 480V ⚡⚡
GI-SHBUM-D1500-480PSUL5	4000K	347 - 480V ⚡⚡




add your accessories*

Accessories Part Number	Description
GI-ACC-OCC	occupancy sensor

other

Warranty	Weight	Case QTY
10 years	17.57 lbs	1 pc

*optional accessory for 120V only

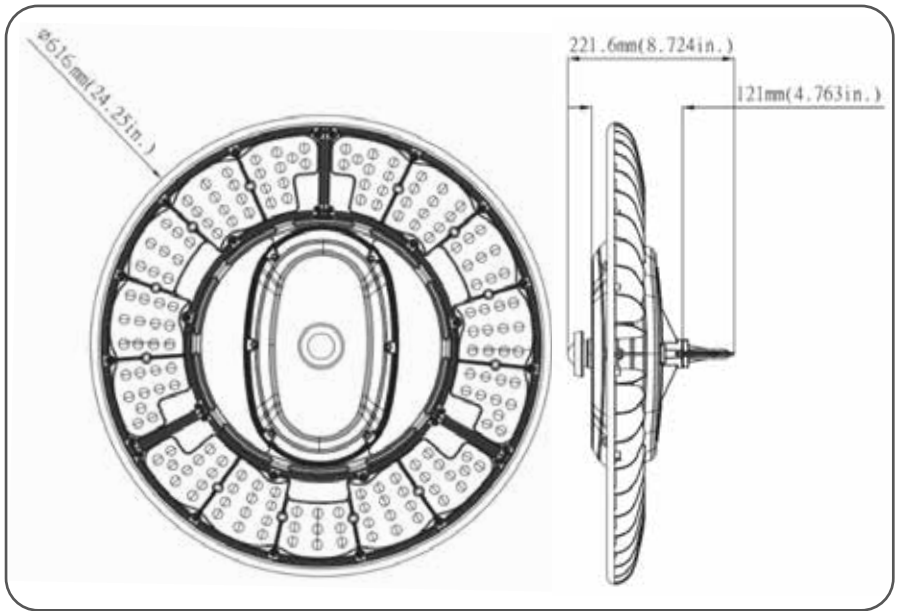

Features

- ▶ Sealed die-casting profile for indoor and outdoor applications.
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Power selectable
- ▶ 0 - 10V Dimmable

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

