




Que-2-TXT™
Questions?
scan to text us fast



U-TUBE T8 / T12 RETROFIT LED LAMPS

1" SPACING | MULTI-FUNCTIONAL
COLOR TEMPERATURE SELECTABLE



specifications

Consumption	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Dimensions
15W	100-277 V or ballast compatible*	83	G13	polycarbonate	FPCB	50,000	-4° - 113°	>0.9	damp location IP20	<20%	240°	22.7" x 2.75"

*approved electronic ballasts

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-U1T8-CCT32P-ULMF4	35K 40K 50K SELECTABLE	2,100	140 lm / w

other


Warranty	Weight	Case QTY
6 years	0.40 lbs	24 pcs

Wiring Diagram

Ballast Compatible




Ballast By-pass

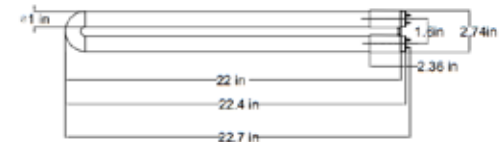

Features

- Mimics traditional fluorescent lamp in light output and shape for seamless retrofit. The whole lamp body lights up including the curved section
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Can be powered by any two pins
- Multi-functional: works with approved instant start ballasts or can be wired directly to 100-277 VAC

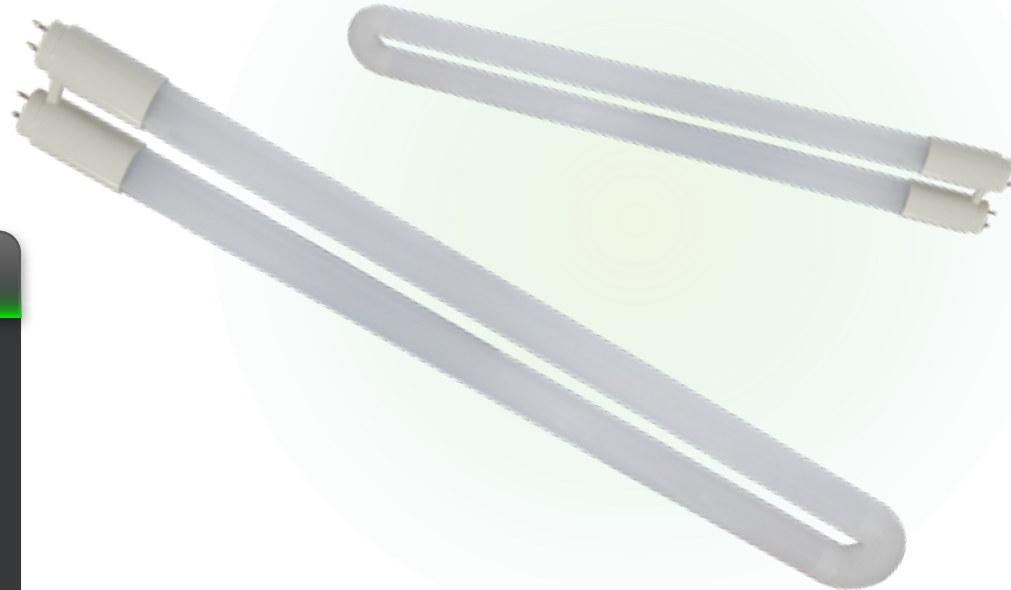

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779