




Que-2-TXT™
Questions?
scan to text us fast



U-TUBE T8 / T12 RETROFIT LED LAMPS

1" SPACING, MULTI-FUNCTIONAL



specifications

Consumption	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Dimensions
13W	100-277 V or ballast compatible*	83	G13	polycarbonate	FPCB	50,000	-4°- 113°	>0.9	damp location IP20	<20%	240°	22.7" x 2.75"

*approved electronic


select your lamp

Part Number	Color Temp	Lumen Output	Efficacy	DLC Code
GI-U1T8-WD32P-ULMF4	3500K	1,800	138 lm / w	
GI-U1T8-D32P-ULMF4	4000K	1,900	146 lm / w	PLOQF1XNP9AM
GI-U1T8-C32P-ULMF4	5000K	2,000	154 lm / w	PLCTELXL7PTZ

other

Warranty	Weight	Case QTY
6 years	0.40 lbs	24 pcs


Wiring Diagram

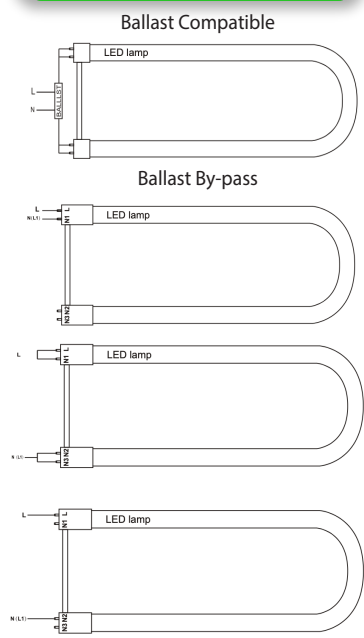



Features

- ▶ Mimics traditional fluorescent lamp in light output and shape for seamless retrofit. The whole lamp body lights up including the curved section
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Can be powered by any two pins
- ▶ Multi-functional: works with approved instant start ballasts or can be wired directly to 100-277 VAC

Isocandela Diagram

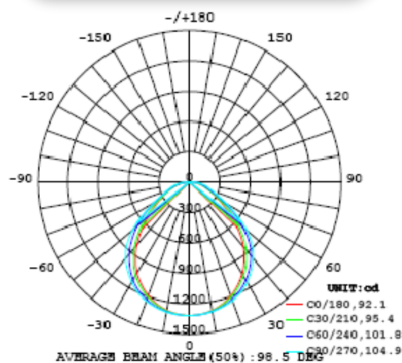

Illuminance Plot (FC)

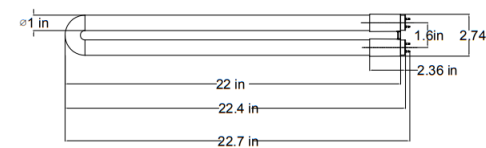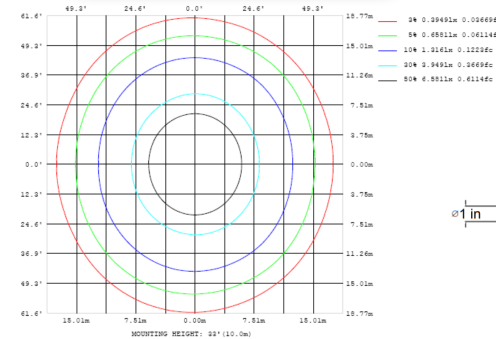

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779