




Que-2-TXT™  
Questions?  
scan to text us fast



# U-TUBE T8 / T12 RETROFIT LED LAMPS

6" SPACING, MULTI-FUNCTIONAL



## specifications

Consumption	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Dimensions
13W	100-277 V or ballast compatible*	83	G13	polycarbonate	FPCB	50,000	-4°- 113°	>0.9	damp location IP20	<20%	240°	22.7" x 7"

\*approved electronic ballasts

## select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-U6T8-WD32P-ULMF4	3500K	1,800	138 lm / w
GI-U6T8-D32P-ULMF4	4000K	1,900	146 lm / w
GI-U6T8-C32P-ULMF4	5000K	2,000	154 lm / w

## other


Warranty	Weight	Case QTY
6 years	0.40 lbs	24 pcs




## Features

- Mimics traditional fluorescent lamp in light output and shape for seamless retrofit. The whole lamp body lights up including the curved section
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Can be powered by any two pins
- Multi-functional: works with approved instant start ballasts or can be wired directly to 100-277 VAC

## Isocandela Diagram

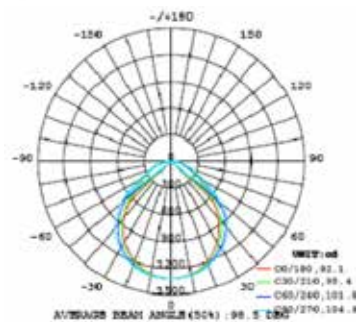

## Illuminance Plot (FC)

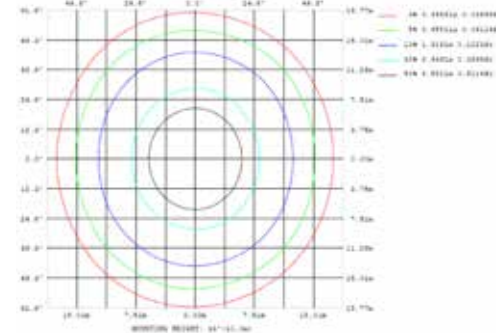


## Wiring Diagram

## Ballast Compatible



## Ballast By-pass

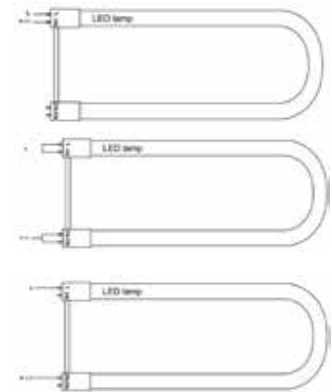

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.



/greenignite  
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779