



Que-2-TXT™
Questions?
scan to text us fast



MINIATURE WALLPACK LED FIXTURE WITH PHOTOCELL

100W

HID equal

specifications

Consumption	Lumen Output	Efficacy	Voltage	Material	Finish	L70 hours	SP	CRI	Ambient Temp (F)	PF	THD	IP Rating
25W	2,600	104 lm /W	100 - 277 V	rugged die-cast aluminum, corrosion resistant housing	dark bronze polyester powder-coat	50,000	10 KV optional (GI-ACC-LV-SP)	> 80	-4° - 113°	> 0.9	< 20%	65 wet location

select your flood light fixture

Part Number	Color Temp	Net Weight
GI-WMF-C100-UL3P	5000K	2.039 lbs




Included accessory

Part Number	Description
GI-ACC-BPC	button photocell



other specifications


Dimensions	Warranty	Case QTY
8.384" (L) 5.4484" (H) 3.523" (W)	6 years	12 pc

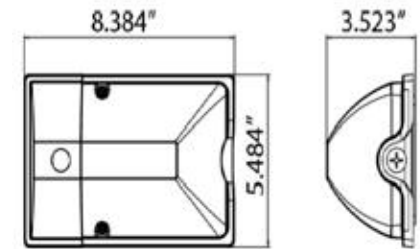


Features

- Housing, electrical compartment and fitter are all made from die cast aluminum that is pre-treated and powder-coated to meet the most rugged industry standards
- Built-in UL class 2 driver, and 120V/277V photocell
- Polycarbonate optical lens with UV stabilizers


Vertical Isolux Plot

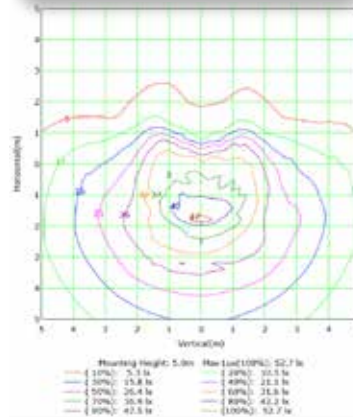

Distance vs Illumination

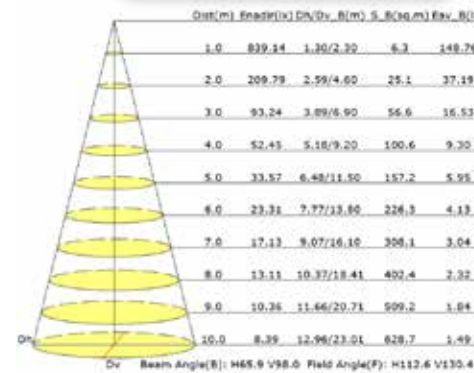

Luminous Intensity Diagram

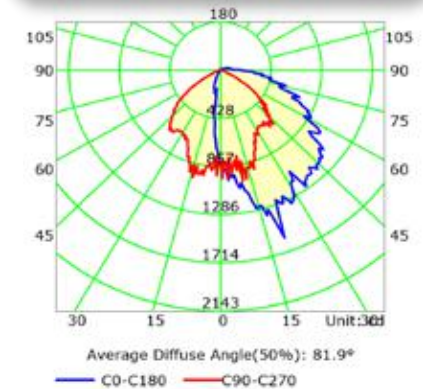

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779