



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
70 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-22°-113°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-MB-C250-UL4	5000K	EX39	10,500	150 lm / W

other

Dimensions	Case QTY	Gross Weight	Warranty
11.57" (L) x 7.01" (W) x 3.35" (D)	8 pcs	2.86 lbs	6 years

add your accessories*


Accessories Part Number	Description
GI-ACC-MBMS	motion sensor
GI-ACC-MBPC	photocell
GI-ACC-MBWF	wifi sensor
GI-ACC-MBDC	dimming connector




*optional

Features


- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Photocell, motion sensor, wifi sensor and dimming accessories available separately
- Foldable wings and rotateable base

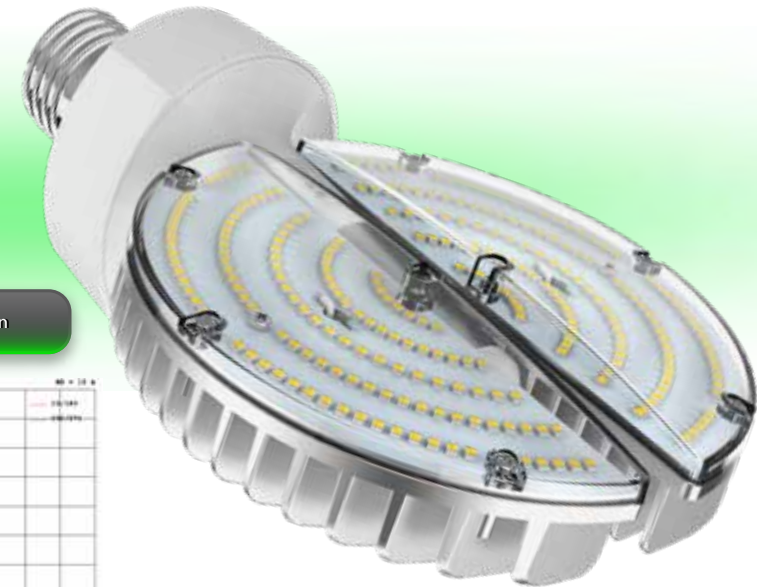

Luminous Intensity Diagram

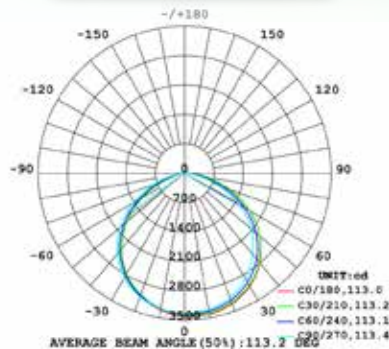

Distance VS Illumination

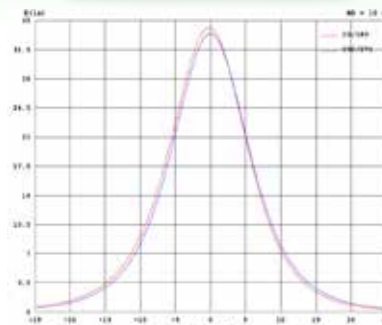

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.





specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
100 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-22° -113°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-MB-C400-UL4	5000K	EX39	15,000	150 lm / W

other

Dimensions	Case QTY	Gross Weight	Warranty
12.36" (L) x 7.01" (W) x 4.61" (D)	4 pcs	3.64 lbs	6 years

add your accessories*


Accessories Part Number	Description
GI-ACC-MBMS	motion sensor
GI-ACC-MBPC	photocell
GI-ACC-MBWF	wifi sensor
GI-ACC-MBDC	dimming connector




*optional

Features


- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Photocell, motion sensor, wifi sensor and dimming accessories available separately
- Foldable wings and rotateable base

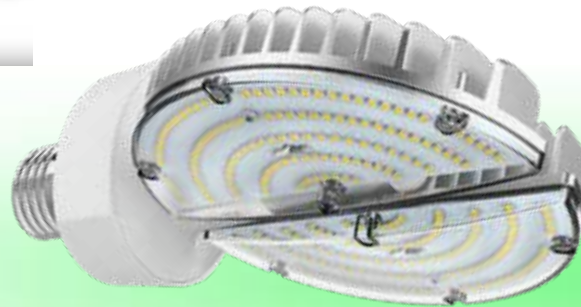

Luminous Intensity Diagram

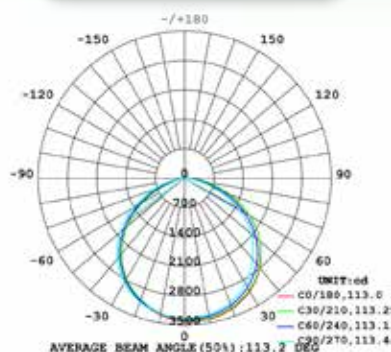

Distance VS Illumination

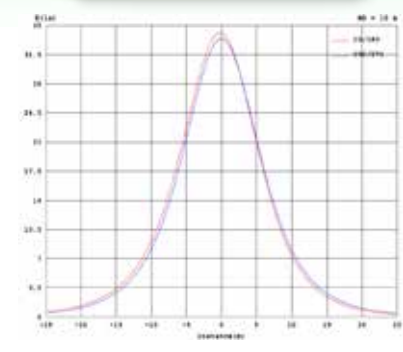

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

