



Que-2-TXT™
Questions?
scan to text us fast



HID EQUAL LED LAMPS

COMPACT GEN 2



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 Hours	Surge Protection	Ambient Temp (F)	Power Factor	UL Listing	THC	Beam Angle	Enclosed Fixture Rated
18 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	1.5 KV built-in	-40° - 122°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-360W100-UL2	3000K	E26	2,250	125 lm / W
GI-CC-360D100-UL2	4000K	E26	2,250	125 lm / W
GI-CC-360C100-UL2	5000K	E26	2,250	125 lm / W




other

Dimensions	Warranty	Gross Weight	Case QTY
6.54" (L) x 2.76" (D)	1 Year	0.77 lbs	24 pcs




Features



- 100% potted drivers- protects electronics against moisture and vibration
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Shatterproof

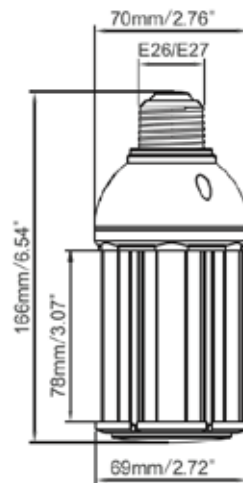

Distance vs Illumination

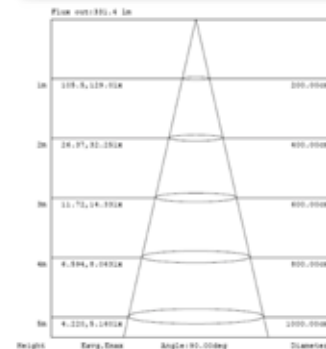

Isolux Diagram

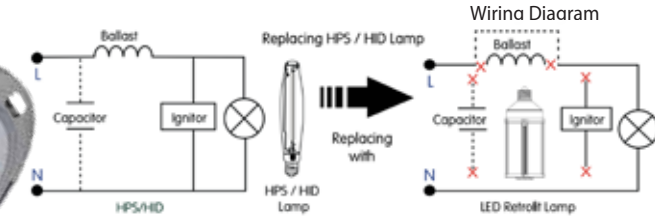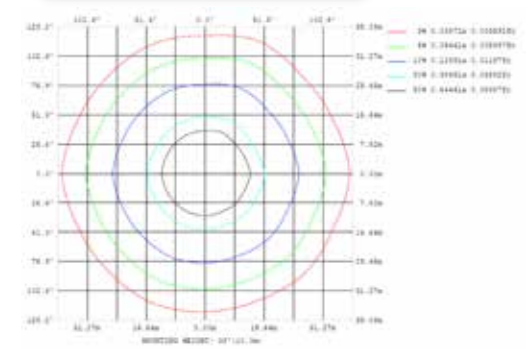

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite

www.greenignite.com

info@greenignite.com

1-877-560-3779



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 Hours	Surge Protection	Ambient Temp (F)	Power Factor	UL Listing	THC	Beam Angle	Enclosed Fixture Rated
18 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	1.5 KV built-in	-40° - 122°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-360W100-UL4	3000K	E26	2,250	125 lm / W
GI-CC-360D100-UL4	4000K	E26	2,250	125 lm / W
GI-CC-360C100-UL4	5000K	E26	2,250	125 lm / W




Features

- 1 Year warranty
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Shatterproof




other

Dimensions	Warranty	Gross Weight	Case QTY
6.5" (L) x 2.35" (D)	1 year	0.77 lbs	24 pcs

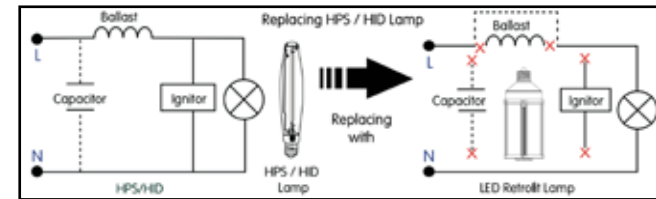


Wiring Diagram

Distance vs Illumination

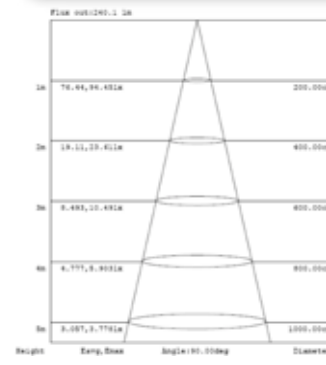

Isolux Diagram

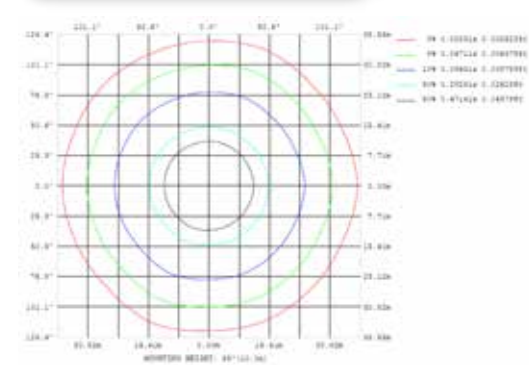

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

