




Que-2-TXT™  
Questions?  
scan to text us fast



4' LINEAR LED TUBE

DIRECT-WIRE

250W

HID equal

specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	Fully Enclosed Fixtures Rated	THC	Beam Angle	Dimensions
18W	100-277 V ⚡	83	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	yes	<20%	320°	47.76" (L) 1.02" (D)

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-4T8D-W34AL-S03	3000K	1,800	100 lm / w
GI-4T8D-D34AL-S03	4000K	1,800	100 lm / w

other


Warranty	Weight	Case QTY
6 years	0.44 lbs	25 pcs




Features

- ▶ Rated for fully enclosed fixtures
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Double side powered
- ▶ Line voltage dimmable
- ▶ Fully shatterproof (plastic lens)
- ▶ Rotatable ends

Wiring Diagram

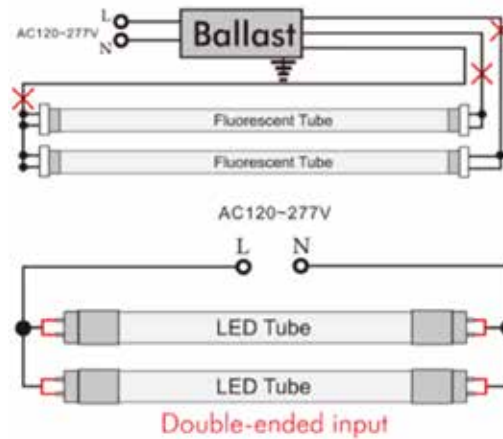

Can be used with any triac dimmer

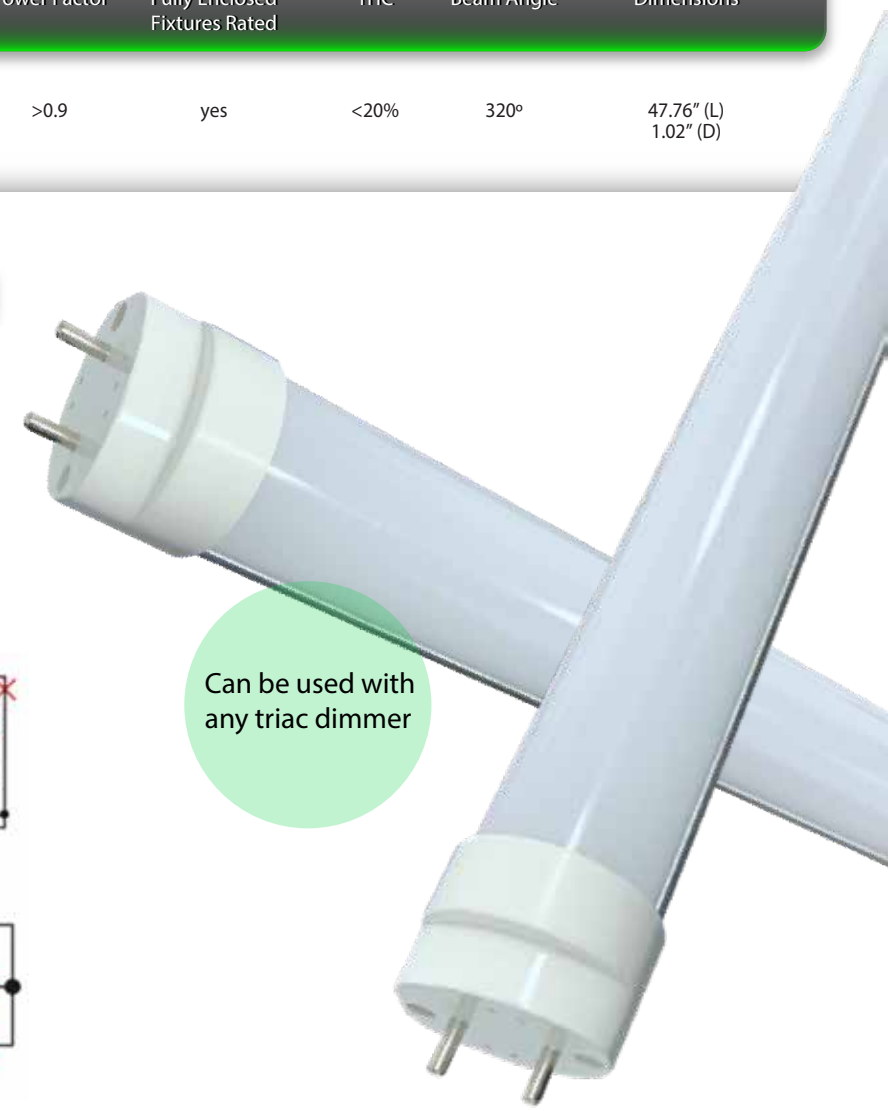

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.



/greenignite  
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779